



reddot winner 2020

JANE

semi-recessed / surface / suspended


EN Highly flexible light rope made of food grade silicone for creative and decorative design; extremely slim design (only 18 mm diameter); for wall-/ceiling surface mounting or suspended mounting (cable suspension, height adjustment without tools); completely homogeneously illuminated, matt surface; 360° light emission; energy-efficient LEDs with very good colour rendering; optionally with external converter for ceiling installation or suspended in combination with the light rope (available as an accessory)

DE Hochflexibles Lichtseil aus lebensmittelechtem Silikon zur kreativen, dekorativen Gestaltung; extrem schlanke Bauform (nur 18 mm Durchmesser); für Wand-/Decken-anbaumontage oder für abgehängte Montage (Seilabhängung, werkzeuglose Höhenverstellung); absolut homogen ausgeleuchtete, matte Oberfläche; 360° Lichtabstrahlung; energieeffiziente LEDs mit sehr guter Farbwiedergabe; wahlweise externer Konverter für Deckeneinwurf oder abgependelt in Kombination mit dem Lichtseil (als Zubehör erhältlich)

Quickinfo

3000K, 4000K
CRI ≥ 90, 3 SDCM
up to 1000lm/m
up to 71lm/W
L80 @ 50000h
non DIM, DALI
IP 40

Types

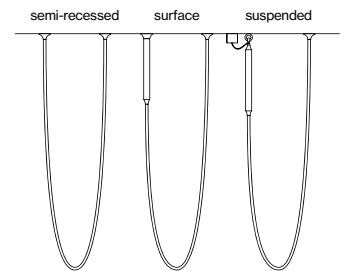

ø18 x 1000-10 000


Canopy colours



Light distribution




360°



many mounting options



dust and insect protection (IP40)



360° light emitting

Order options

COLOUR TEMPERATURE ◆◆

3000K	5
4000K	6

CONTROL ◆


non DIM	1
DALI	3

LENGTH L


1000 mm	1
2000 mm	2
3000 mm	3
4000 mm	4
6000 mm	6
8000 mm	8
10000 mm	0

MATERIAL COLOUR ■

○ traffic white RAL 9016	7
● jet black RAL 9005	8

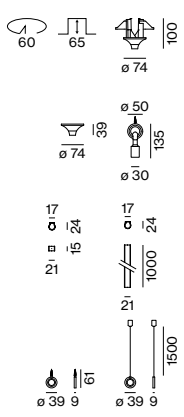

JANE semi-recessed / surface / suspended




LUMINAIRE

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14.4W/m	3000K	812lm/m	058-651L::10
	4000K	1000lm/m	

Mounting accessories

MOUNTING ACCESSORIES

TYPE	L-W-H (mm)	ORDER CODE
1 mounting set recessed	ø74-100	058-659021 ■
2 mounting set surface	ø74-39	058-659101 ■
3 mounting set suspended	ø50/30-135	058-659201 ■
4 clip surface (transparent)	15-21-24	058-6591410
5 channel surface (transparent)	1000-21-24	058-6591110
6 mounting ring surface	ø39-9-61	058-659161 ■
7 mounting ring suspended	ø39-9	058-659261 ■

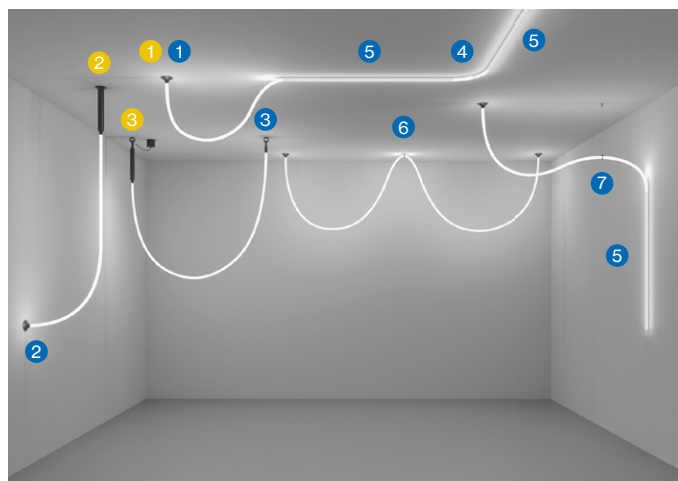

various mounting options with different mounting accessories

Electrical accessories

1 POWER SUPPLY RECESSED 220-240 V AC, 48V, 50-60Hz

TYPE		L-W-H (mm)	ORDER CODE
100 W recessed	<input type="checkbox"/> PC II	350-30-18	002-62134
150 W recessed	<input type="checkbox"/> PC II	350-30-18	002-62135
60 W revision opening	<input type="checkbox"/> PC II	163-43-32	002-62133
100 W revision opening	<input type="checkbox"/> PC II	350-30-18	002-62134
150 W revision opening	<input type="checkbox"/> PC II	350-30-18	002-62135
250 W revision opening	<input type="checkbox"/> PC II	400-40-22	002-62139
320 W revision opening	<input type="checkbox"/> PC I	252-90-44	002-60320
DALI device		120-30-22	058-6599330

2 POWER SUPPLY SURFACE 220-240 V AC, 48V, 50-60Hz

TYPE		L-ø (mm)	ORDER CODE
100 W surface	<input type="checkbox"/> PC II	584-ø40	058-65912 ◆ ◆
150 W surface	<input type="checkbox"/> PC II	584-ø40	058-65913 ◆ ◆

3 POWER SUPPLY SUSPENDED 220-240 V AC, 48V, 50-60Hz

TYPE		L-ø (mm)	ORDER CODE
100 W suspended	<input type="checkbox"/> PC II	639-ø40	058-65922 ◆ ◆
150 W suspended	<input type="checkbox"/> PC II	639-ø40	058-65923 ◆ ◆

incl. ceiling canopy and 2000mm power cable

LUMINOUS FLUX value calculated for CRI ≥ 90, colour white, rope silicone