



Description

EN Spot made of aluminium; surface black or natural anodised; spot 352° rotatable and 90° tiltable; plug and play electrical connector system; available as recessed or surface-mounted variant; available in 3 beam angles; optical attachments available as accessories; passively cooled high-power LED system; available in the light colours 3000K and 4000K; min. 90% of the luminous flux after 50 000 hours; CRI ≥ 90; 500 mA or 700 mA converter plug and play; converter separately available; degree of protection IP20; PC I / PC II (power supply) or PC III (light insets); optionally non-dimmable or DALI-2 control

DE Strahler aus Aluminium; Oberfläche schwarz oder natureloxiert; Strahler 352° dreh- und 90° schwenkbar; durchkontaktiertes elektrisches Stecksystem; lieferbar als Einbau- oder Aufbauvariante; verfügbar in 3 verschiedenen Ausstrahlwinkeln; optische Aufsätze sind als Zubehör erhältlich; passiv gekühltes High-Power-LED System; lieferbar in den Lichtfarben 3000K und 4000K; min. 90% des Lichtstromes nach 50 000 h Lebensdauer; CRI ≥ 90; 500 mA bzw. 700 mA Konverter steckerfertig vorkonfektioniert; Konverter ist separat zu bestellen; Schutzart IP20; SK I / SK II (Netzversorgung) bzw. SK III (Lichteinsätze); wahlweise nicht dimmbar oder DALI-2 Steuerung

JUST 32

semi-recessed / surface

Quickinfo

3000 K, 4000 K
CRI ≥ 90
L90 @ 50 000 h
up to 570 lm
non DIM, DALI-2

Types



Colours




Light distributions



Order options

MOUNTING

ceiling recessed clip	6
surface housing	8

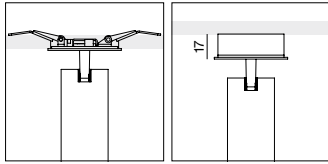

COLOUR TEMPERATURE

3000K CRI \geq 90 530lm*	5
4000K CRI \geq 90 570lm*	6

* per fixture | CRI \geq 90 | 700 mA | 72 °C

MATERIAL COLOUR



anodised aluminium	6
anodised black	8



BEAM ANGLE


spot 19°	S
medium 27°	M
flood 42°	F

JUST 32

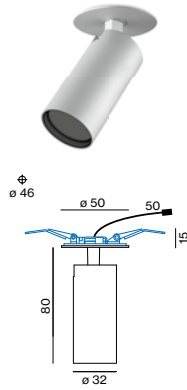


SYSTEM POWER / VOLTAGE	NO. OF LEDS	Ø (mm)	ORDER CODE
5.2 W / 7.5 W / 11 V	1	32	007-4187:1

ILLUMINANCE EXAMPLE (E_{max} in lux)

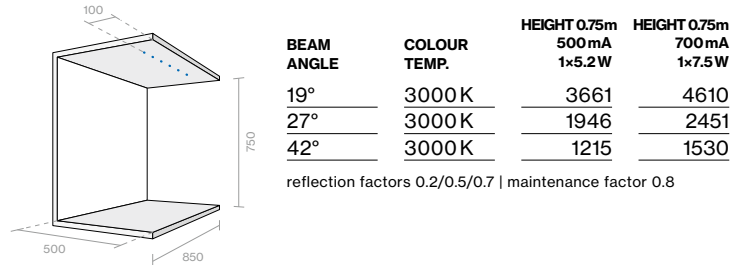

LIGHT DISTRIBUTION

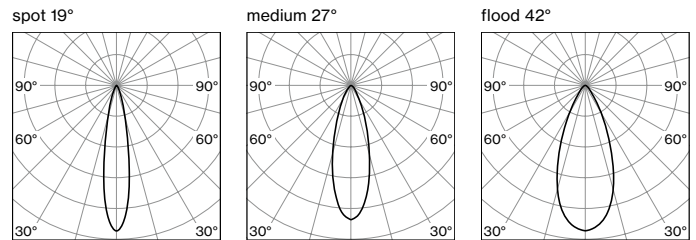

Electrical accessories

CONVERTER supply 220-240 V AC, 500 mA, 50-60 Hz

incl. power cable 2 m + connection cable with plug 1 m

TYPE	FIXTURES	CABLE (m)	L-W-H (mm)	ORDER CODE
8 W / 3-14 V non DIM □ PC II	1	max. 18	64-34-21	007-1952160
30 W / 2-50 V non DIM ⊕ PC I	2-5	max. 18	187-30-21	007-1952560
38 W / 10-54 V DALI-2 □ PC II	2-5	max. 18	147-44-30	007-1952580

CONVERTER supply 220-240 V AC, 700 mA, 50-60 Hz, □ PC II

incl. power cable 2 m + connection cable with plug 1 m

TYPE	FIXTURES	CABLE (m)	L-W-H (mm)	ORDER CODE
10 W / 7-14 V non DIM	1	max. 18	95-53-25	007-1953260
20 W / 2-28 V non DIM	1-2	max. 18	111-52-22	007-1953360
45 W / 20-54 V non DIM	2-4	max. 18	215-70-31	007-1953510
20 W / 2-28 V DALI-2	1-2	max. 18	111-52-22	007-1953380
38 W / 10-54 V DALI-2	2-4	max. 18	147-44-30	007-1953580

SPLITTER SERIAL, AWG22

TYPE	INPUT / OUTPUT	L-W-H (mm)	ORDER CODE
splitter 500 mA + cable 500 mm	1 × socket / 9 × plug	85-50-10	007-1959210
splitter 700 mA + cable 500 mm	1 × socket / 9 × plug	85-50-10	007-1959310

EXTENSION CABLE

TYPE	INPUT / OUTPUT	L (mm)	ORDER CODE
extension cable	1 × socket / 1 × plug	1000	007-1961260
extension cable	1 × socket / 1 × plug	2000	007-1961460
extension cable	1 × socket / 1 × plug	4000	007-1961660

Optical accessories

TYPE	Ø-H (mm)	ORDER CODE
honeycomb louver	30-4	007-1965168
elliptical sculpture foil	30-4	007-1965260
snoot	30-15	007-1965368
colour filter (red, blue, green, etc.)	30-4	on request